



WATERPROOF DIGITAL OUTSIDE MICROMETERS (WITH DATA OUTPUT INTERFACE)

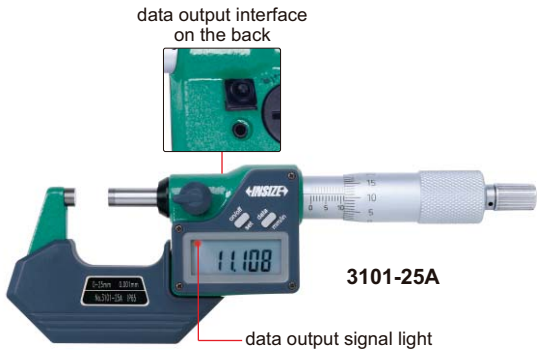

- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, data output
- Automatic power off
- Carbide measuring faces
- Supplied with spherical anvil
- Setting standards are included (except 0-25mm/0-1")
- Optional accessory: data output cable (code 7315-30, 7302-30)

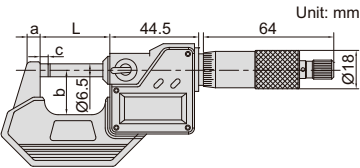

Metric/Inch type (ratchet stop) (mm)

Code	Range	Resolution	Accuracy	L	a	b	c
3101-25A *	0-25mm/0-1"	0.001mm/0.00005"	±2µm	34.5	6	25	3
3101-50A *	25-50mm/1-2"	0.001mm/0.00005"	±2µm	59.5	8	32	3
3101-75A *	50-75mm/2-3"	0.001mm/0.00005"	±3µm	84.5	8	44.5	3
3101-100A *	75-100mm/3-4"	0.001mm/0.00005"	±3µm	109.5	8	57	3
3101-125A	100-125mm/4-5"	0.001mm/0.00005"	±3µm	135	10	70	3
3101-150A	125-150mm/5-6"	0.001mm/0.00005"	±3µm	160.5	10	82	3
3101-175A	150-175mm/6-7"	0.001mm/0.00005"	±4µm	186	12	94.5	5.5
3101-200A	175-200mm/7-8"	0.001mm/0.00005"	±4µm	211.5	12	107	5.5
3101-225A	200-225mm/8-9"	0.001mm/0.00005"	±4µm	236	23	129.5	5.5
3101-250A	225-250mm/9-10"	0.001mm/0.00005"	±4µm	261.5	23	142.5	5.5
3101-275A	250-275mm/10-11"	0.001mm/0.0001"	±5µm	287	23	155	5.5
3101-300A	275-300mm/11-12"	0.001mm/0.0001"	±5µm	312.5	23	167.5	5.5



Metric/Inch type (friction thimble) (mm)

Code	Range	Resolution	Accuracy	L	a	b	c
3101-25FA *	0-25mm/0-1"	0.001mm/0.00005"	±2µm	34.5	6	25	3

Metric type (ratchet stop) (mm)

Code	Range	Resolution	Accuracy	L	a	b	c
3101-25AJ *	0-25mm	0.001mm	±2µm	34.5	6	25	3
3101-50AJ *	25-50mm	0.001mm	±2µm	59.5	8	32	3
3101-75AJ *	50-75mm	0.001mm	±3µm	84.5	8	44.5	3
3101-100AJ *	75-100mm	0.001mm	±3µm	109.5	8	57	3



Set (ratchet stop type)

Code	Range	Micrometers included	Packaging
3101-753A *	0-75mm/0-3"	3101-25A, 3101-50A, 3101-75A	blow mould case
3101-1004A *	0-100mm/0-4"	3101-25A, 3101-50A, 3101-75A, 3101-100A	blow mould case
3101-1506A	0-150mm/0-6"	3101-25A, 3101-50A, 3101-75A, 3101-100A, 3101-125A, 3101-150A	aluminum box



* Supplied with manufacturer inspection certificate traceable to DKD Germany