



### Features:

- Thick Insulation Ensures Lowest Electric Consumption
- Inner Enamel Coating Ensures Long Lifetime
- Oversized Magnesium Anode Provides the Most Protection Against Corrosion
- Electrostatic Polyester Outer Coating Provides Artistic Look & Ensures Protection
- CE Certified
- Analogue Thermometer Display

Specifications	Container Capacity	
	20 H.	40 H.
30 Lit	336	822
50 Lit	210	515
80 Lit	180	385
100 Lit	160	300
120 Lit	144	290




### Technical Specifications:

Electrical Specifications	Volt	230 V
Frequency	50 - 60 Hz	
Working Pressure	7.5 Bar (0.75 Mpa)	
Max. Setting Temp.	75° C	
Thermal Safety Cut-Out Limit	99° C	
Thermostat Safety Levels	Double Safety	
Basic Insulation	Class I	
Degree of Protection	IPX4	
Boiler Material	Steel	
Boiler Coating	Porcelain	
Insulation	Polyurethane Foam	
Inlet & Outlet Pipes	Stainless Steel	
Upper & Lower Covers	Metal	
External Coating	Epoxy/ Polyester	
Heating Element	Copper	
		<b>Capacity</b>
	50L	80L
	15	20
	17	22.5
Weight	Net (kg)	Gross (kg)
Heater Type	Vertical	Horizontal
Installation	Vertical	Horizontal
Package Dimensions mm	490*465*610	490*465*815









<b>Electrical Specifications</b>	230 V	
Frequency	50 - 60 Hz	
Working Pressure	7.5 Bar (0.75 Mpa)	
Max. Setting Temp.	75° C	
Thermal Safety Cut-Out Limit	99° C	
Thermostat Safety Levels	Double Safety	
Basic Insulation	Class I	
Degree of Protection	IPX4	
Boiler Material	Steel	
Boiler Coating	Porcelain	
Insulation	Polyurethane Foam	
Inlet & Outlet Pipes	Stainless Steel	
Upper & Lower Covers	Metal	
External Coating	Epoxy/ Polyester	
Heating Element	Copper	
	<b>Capacity</b>	
	100L	
Weight	Net (kg)	120L
	Gross (kg)	26.4
Heater Type	Flange	29
	Flange	26
Installation	Vertical	Vertical
	Horizontal	Horizontal
Package Dimensions mm	490*465*960	490*465*1075



**Dimensions:**

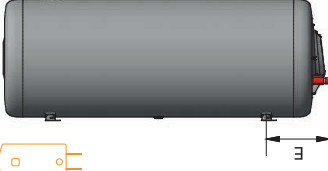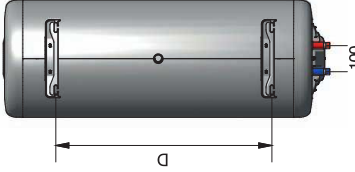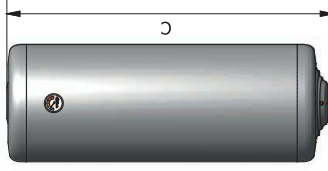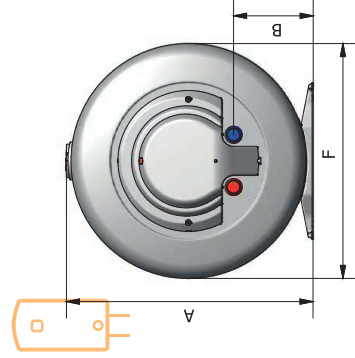

Model	Storage Capacity	Voltage (V)	Power (W)	Packing Dimensions (mm)	Shipping Weight		D (mm)	E (mm)	F (mm)
					Lit	U.S. Gals			
Marina	150	230	2000	490*465*1280	77	85	830	245	450

